

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)


PCT

(10) International Publication Number
WO 2005/062351 A1

- (51) International Patent Classification⁷: **H01L 21/027**, G03F 7/20
- (74) Agent: **FUJIMOTO, Ryosuke**; Fujimoto Patent Office, Yaesu Nagoya Building 6th Floor, 2-10, Yaesu 2-chome, Chuo-ku, Tokyo 1040028 (JP).
- (21) International Application Number:
PCT/JP2004/018958
- (22) International Filing Date:
13 December 2004 (13.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2003-422932 19 December 2003 (19.12.2003) JP
- (71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA** [JP/JP]; 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 1468501 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HONDA, Tokuyuki** [JP/JP]; c/o Canon Kabushiki Kaisha, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 1468501 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: EXPOSURE APPARATUS AND DEVICE MANUFACTURING METHOD

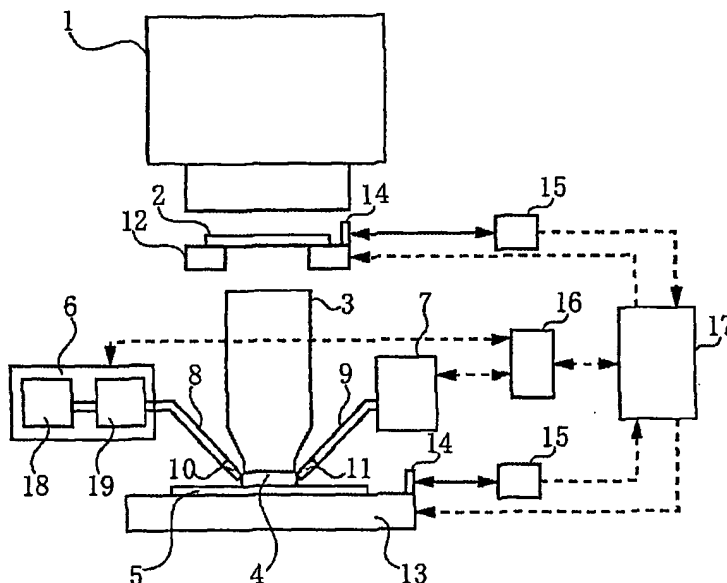

(57) Abstract: An exposure apparatus includes a projection optical system (3) for projecting a pattern of a mask (2) onto a substrate (5), and a fluid supply unit (6) for supplying a fluid between said projection optical system and the substrate, said fluid supply unit (6) including an injection unit (19) for injecting carbon dioxide into the fluid.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION**EXPOSURE APPARATUS AND DEVICE MANUFACTURING METHOD****5 TECHNICAL FIELD**

 This invention relates generally to an exposure apparatus that utilizes an immersion method, and is suitable, for example, for the lithography process for manufacturing highly integrated devices, such as semiconductor devices, e.g., ICs and LSIs, image pick-up devices, e.g., CCDs, display devices, e.g., a liquid crystal panels, communication devices, e.g., optical waveguides, and magnetic heads by transferring a pattern of a mask (or a reticle) onto a photosensitive agent applied substrate.

BACKGROUND ART

 An exposure apparatus for exposing a mask pattern onto a photosensitive-agent applied substrate have conventionally been used to manufacture semiconductor devices and liquid crystal panels. Since finer processing of a pattern is demanded for improved integrations of devices, exposure apparatuses are improved so as to resolve fine patterns.

The following Rayleigh equation (1) defines resolution R of a projection optical system in an exposure apparatus, which is an index of a size of a resolvable pattern:

$$5 \quad R = k_1 (\lambda / NA) \quad (1)$$

where λ is an exposure wavelength, NA is a numerical aperture of the projection optical system at its image side, and k_1 is a constant determined by a development process and others, which usually is approximately 0.5.

10 As understood from Equation (1), the resolving power of the optical system in the exposure apparatus becomes higher as the exposure wavelength is shorter and the image-side NA of the projection optical system is greater.

15 Therefore, following the mercury lamp i-line (with
approximately 365 nm in wavelength), a KrF excimer
laser (with approximately 248 nm in wavelength) and an
ArF excimer laser (with approximately 193 nm in
wavelength) have been developed, and more recently an
20 F₂ excimer laser (with approximately 157 nm in
wavelength) is reduced to practice. However, a
selection of the exposure light having a shorter
wavelength makes it difficult to meet material
requirements with respect to transmittance, uniformity
25 and durability, etc., causing an increasing cost of the
apparatus.

An exposure apparatus having a projection optical system with a NA of 0.85 is commercially available, and a projection optical system with a NA of 0.9 or greater is researched and developed. Such a high-NA exposure
5 apparatus has difficulties in maintaining good imaging performance with little aberration over a large area, and thus utilizes a scanning exposure system that synchronizes the mask with a substrate during exposure.

However, a conventional design cannot make the NA
10 greater than 1 in principle due to a gas layer having a refractive index of about 1 between the projection optical system and the substrate.

On the other hand, an immersion method is proposed as means for improving the resolving power by
15 equivalently shortening the exposure wavelength. It is a method used for the projection exposure, which fills liquid in a space between the final surface of the projection optical system and the substrate, instead of filling this space with air as in the prior art. The
20 projection exposure apparatus uses, as the immersion method, a method for immersing the final surface of the projection optical system and the entire substrate in the liquid tank (see, for example, Japanese Patent Application, Publication No. 6-124873), and a local
25 fill method that flows the fluid only in the space between the projection optical system and the substrate

(see, for example, International Publication No. WO99/49504 pamphlet).

The immersion method has an advantage in that the equivalent exposure wavelength has a wavelength of a light source times $1 / n$, where n is a refractive index of the used liquid. This means that the resolving power enhances by $1 / n$ times the conventional resolving power, even when the light source having the same wavelength is used.

10 For example, when the light source has a wavelength of 193 nm and the fluid is the water, the refractive index is about 1.44. Therefore, use of the immersion method can improve the resolving power by $1 / 1.44$ times the conventional method.

15 The most common fluid used for the immersion method is water. The water has a good transmittance relative to the ultraviolet light down to about 190 nm. In addition, advantageously, a large amount of water is used in the semiconductor manufacturing process, and
20 the water gets along with the wafer and photosensitive agent.

It is important to reduce the influence of the air gas bubbles to the exposure in the immersion exposure apparatus. These gas bubbles that enter the exposure
25 area between the final surface of the projection optical system and the substrate scatter the exposure light. Therefore, the transferred pattern's critical

dimension varies beyond the permissible range, causing insulations and short circuits contrary to the design intent in the worst case. Degassing of the fluid is the most effective, known method to prevent the influence of the gas bubbles to the exposure. Since the gas bubbles are unlikely to occur or the generated gas bubbles extinguish in a short time period in the degassed fluid, the influence of the gas bubbles to the exposure is prevented.

10 However, the water widely used for the immersion method increases the resistivity, when degassed, and is likely to generate static electricity disadvantageously. For example, the pure water (*i.e.*, the water containing few impurities) used for the semiconductor

15 manufacturing process reaches the resistivity of 18 M Ω ·cm after degas. The substrate surface is electrically insulated since the photosensitive agent is applied on it. Therefore, as the stage moves the substrate, the static electricity is generated on the

20 substrate surface and makes the device on the substrate defective.

DISCLOSURE OF INVENTION

25 With the foregoing in mind, the present invention has an exemplary object to provide an exposure

apparatus that uses an immersion method while reducing the static electricity on the substrate.

An exposure apparatus according to one aspect of the present invention includes a projection optical
5 system for projecting a pattern of a mask onto a substrate, and a fluid supply unit for supplying a fluid between the projection optical system and the substrate, the fluid supply unit including an injection unit for injecting carbon dioxide into the fluid.

10 An exposure apparatus according to another aspect of the present invention includes an illumination optical system for illuminating a mask using light from a light source, and a projection optical system for projecting a pattern of the mask onto a substrate,
15 wherein a fluid supplied to a space between the projection optical system and the substrate has a concentration of carbon dioxide between 0.02 ppm and 750 ppm.

An exposure apparatus according to still another
20 aspect of the present invention includes an illumination optical system for illuminating a mask using light from a light source, and a projection optical system for projecting a pattern of the mask onto a substrate, wherein a fluid supplied to a space
25 between the projection optical system and the substrate has a resistivity value between 0.02 MΩ·cm and 10 MΩ·cm.

A device manufacturing method according to another aspect of the present invention includes the steps of exposing an object using the above exposure apparatus, and developing the exposed object.

5 Other objects and further features of the present invention will become readily apparent from the following description of the embodiments with reference to accompanying drawings.

10 **BRIEF DESCRIPTION OF DRAWINGS**

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and, together
15 with the description, serve to explain the principles of the invention.

FIG. 1 is a schematic view of a principal part in an exposure apparatus of a first embodiment.

FIG. 2 is a schematic view showing a structural
20 example of an injection unit of carbon dioxide.

FIG. 3 is an explanatory view showing a relationship between a potential on a wafer and a pure water's resistivity in a wafer's cleansing step.

FIG. 4 is an explanatory view showing a
25 relationship between the pure water's resistivity and the concentration of carbon dioxide.

FIG. 5 is an explanatory view showing a relationship between a normalized life of a gas bubble and a normalized concentration of a dissolved gas.

FIG. 6 is an explanatory view showing a relationship between a water's PH value and a concentration of the carbon dioxide.

FIG. 7 is a schematic view showing a principal part of an exposure apparatus as a variation of the first embodiment.

FIG. 8 is a manufacture flow of a device.

FIG. 9 is a wafer process shown in FIG. 8.

BEST MODE FOR CARRYING OUT THE INVENTION

Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

FIRST EMBODIMENT

FIG. 1 is a schematic view of a principal part of an exposure according to a first embodiment. This embodiment applies the present invention to a scanning exposure apparatus.

In FIG. 1, 1 denotes an illumination optical system for illuminating a reticle (or a mask) with light from a light source. The light source is an ArF excimer laser (with a wavelength of 193 nm), a KrF

THIS PAGE BLANK (USP10)

excimer laser (with a wavelength of 248 nm), and F₂ laser, and the illumination optical system 1 includes a known optical system etc. (not shown). 3 denotes a refracting or catadioptric or another projection optical system for projecting a circuit pattern of a reticle 2 illuminated by the illumination optical system 1, onto a wafer 5 (substrate) as a second object. 15 denotes a distance measuring laser interferometer for measuring a two-dimensional position on a horizontal plane of each of a reticle stage 12 and a wafer stage 13 via a reference mirror 14. A stage controller 17 controls positioning and synchronizations of the reticle 2 and the wafer 5 based on this measurement value. The wafer stage 13 serves to adjust a position in a longitudinal direction, a rotational angle, and an inclination of a wafer so that the surface of the wafer 5 matches the image surface of the projection optical system 3.

This embodiment uses the immersion method to shorten the equivalent exposure wavelength, and improve the exposure resolution. Therefore, this embodiment arranges a supply port 10 and a recovery port 11 around the final surface of the projection optical system 3, supply the water between the final surface of the projection optical system 3 and the wafer 5, and form a liquid film 4 there. An interval between the final surface of the projection optical system 3 and the

wafer 5 is preferably small enough to stably form the liquid film 4, such as 0.5 mm. The supply port 10 is connected via a supply tube 8 to a fluid supply unit 6 that supplies the water. The recovery port 11 is
5 connected via a recovery tube 9 to a fluid recovery unit 7 that recovers the water. The fluid supply unit 6 includes a degassing unit 18 and a carbon dioxide injection unit 19 provided at the downstream of the degassing unit 18. The degassing unit 18 can have, for
10 example, a well-known membrane module (not shown) and a vacuum pump (not shown). An immersion controller 16 sends a control signal to the fluid supply unit 6 and the fluid recovery unit 7, and transmits and receives data with a stage controller 17. Thereby, the
15 immersion controller 16 adjusts the liquid supply amount and recovery amount according to the wafer's moving direction and speed.

This embodiment injects a predetermined concentration of carbon dioxide into the degassed water,
20 prevents influence of gas bubbles to the exposure, and restrains the static electricity on the substrate. Carbon dioxide advantageously is inexpensive and does not contaminate the substrate. Referring to FIG. 2, a description will be given of one exemplary structure of
25 the carbon dioxide injection unit 19. A membrane module 22 is provided between an inflow port 20 of the water and an outflow port 21. The membrane module 22

is connected to a supply source 24, such as a CO₂ cylinder, via a valve 23. The valve 23 is electrically controlled by a carbon dioxide controller 25.

This configuration restrains a concentration of
5 the carbon dioxide in the water by changing the flow of the carbon dioxide to the membrane module 22 via the valve 23. A resistivity meter 26 is provided at a downstream side of the carbon dioxide injection unit. It is more preferable to control the concentration of
10 the carbon dioxide within a predetermined range by electrically feeding back an output of the resistivity meter 26 to the carbon dioxide controller 25. Carbon dioxide gas may be injected into the water from a nozzle instead of using a membrane module. In this
15 case, it is preferable to eliminate fine particles in the carbon dioxide gas using a filter in advance.

A description will now be given of an optimal concentration of carbon dioxide.

The lower limit of the carbon-dioxide
20 concentration is determined from the necessity to restrain the static electricity on the wafer. FIG. 3 shows a relationship between the potential on the wafer and the water's resistivity when the wafer is cleansed with pure water from the nozzle (as detailed in Asano,
25 "Spray, Contact, Flow Charges of Pure Water and Ultra-pure Water", The Institute of Electrical Engineering of Japan, Vol. 108 (1988), pp. 362-366). It is understood

from FIG. 3 that when the water's resistivity exceeds 10 MΩ·cm, the large potential is likely to generate on the wafer. On the other hand, when the water's resistivity is equal to or smaller than 5 MΩ·cm, the static electricity does not pose a problem. FIG. 4 shows a relationship between the carbon-dioxide concentration and the resistivity in the pure water. As the carbon-dioxide concentration increases, the resistivity decreases. The carbon-dioxide concentrations of 0.02 ppm and 0.06 ppm correspond to the resistivity of 10 MΩ·cm and 5 MΩ·cm. This means that the carbon-dioxide concentration in the water is preferably 0.02 ppm or greater, more preferably 0.06 ppm or greater, in order to restrain the static electricity on the wafer.

The upper limit of the carbon-dioxide concentration can be determined from a problem of the gas bubbles. The gas-bubble generation is caused by a pressure variance in the water and inclusions of fine gas bubbles in the carbon-dioxide injection unit. In either case, as the carbon-dioxide concentration in the water increases, the gas bubble is likely to generate and its life (or a time period during which a generated gas bubble extinguishes due to diffusion) becomes long. In other words, the gas bubble is unlikely to extinguish and a danger of the influence of the gas bubbles to the exposure increases. FIG. 5 shows the

normalized life τ / τ_0 of a gas bubble as a function of C_g / C_{∞} as a normalized concentration of dissolved gas (as detailed in C. E. Brennen, "Cavitation and Bubble Dynamics, "Oxford University Press (1995), Chapter 2).

5 Here, τ_0 is the life when $C_{\infty} = 0.0$ and C_g is a saturated concentration. When normalized concentration C_g / C_{∞} is 0.2 or smaller, the life of a gas bubble is close to $C_{\infty} = 0.0$ and the gas bubble is likely to extinguish relatively immediately. On the other hand, when
10 normalized concentration C_g / C_{∞} becomes 0.5 or greater, the life of a gas bubble drastically increases and gas bubble is unlikely to extinguish. As a result of this, in order to prevent the influence of the gas bubble to the exposure, the concentration of gas dissolved in the
15 water is preferably 50 % or smaller of the saturated concentration, and more preferably 20 % or smaller of the saturated concentration. The saturated concentration of carbon dioxide in the water is about 1500 ppm in one air pressure. Therefore, in order to
20 prevent the influence of the gas bubbles to the exposure, the carbon-dioxide concentration may be preferably 750 ppm or smaller, more preferably 300 ppm. These values are much greater than the lower limit of the carbon-dioxide concentration necessary to restrain
25 the static electricity, and it is possible to reconcile the prevention of the gas bubble's influence with the restraint of the static electricity.

In summary, the carbon-dioxide concentration in the water supplied to the liquid film 4 ranges preferably from 0.02 ppm to 750 ppm, and more preferably from 0.06 ppm to 300 ppm. The equivalent
5 condition is that the resistivity ranges preferably from 0.02 M Ω ·cm to 10 M Ω ·cm, and more preferably from 0.04 M Ω ·cm to 5 M Ω ·cm. This configuration prevents the influence of the gas bubbles to the exposure and restrains the static electricity on the substrate.

10 This embodiment can implement an acid environment suitable for a chemical amplification type of resist. The chemical amplification type of resist is widely used as the highly sensitive resist optimal to the lithography that uses a KrF laser and an ArF laser for
15 a light source. On the other hand, when alkali contaminations in the water, such as ammonia, enter the resist surface in the chemical amplification type of resist, a chemical reaction is restricted and a problem on the pattern, such as T-top, occurs. This embodiment
20 decreases the PH value by dissolving carbon dioxide in the water, and restrains the influence of alkali contaminations. FIG. 6 shows a relationship between the water's PH value and the carbon-dioxide concentration.

25 Usually, the semiconductor factory has the pure water facility, and many of the pure water facilities have a degassing function. Where the degassed water is

supplied from the pure water facility outside the exposure apparatus to the projection exposure apparatus, the projection exposure apparatus can omit the degassing unit 18. The omission of the degassing unit 18 would reduce the cost. FIG. 7 shows a variation of the exposure apparatus according to the instant embodiment that implements the above concept. The exposure apparatus as a variation differs from that shown in FIG. 1 in that the fluid supply unit 6 has no degassing unit. A structure of the carbon-dioxide injection unit, the optimal carbon-dioxide concentration in the water and resistivity in the exposure apparatus in this variation are the same as those in the exposure apparatus shown in FIG. 1.

Thus, the immersion exposure apparatus of this embodiment prevents the influence of the gas bubbles to the exposure and restrains the static electricity on the substrate.

20 SECOND EMBODIMENT

A description will now be given of an embodiment of a device manufacturing method using the exposure apparatus of the first embodiment.

FIG. 8 is a flowchart for explaining a fabrication of devices (*i.e.*, semiconductor chips such as IC and LSI, liquid crystal panels, and CCDs). Step 1 (circuit

design) designs a device circuit. Step 2 (mask fabrication) forms a reticle having the designed circuit pattern. Step 3 (wafer making) manufactures a wafer using materials such as silicon. Step 4 (wafer process), which is referred to as a preprocess, forms actual circuitry on the wafer through photolithography using the mask and wafer. Step 5 (assembly), which is also referred to as a postprocess, forms into a semiconductor chip the wafer formed in Step 4 and includes an assembly step (e.g., dicing, bonding), a packaging step (chip sealing), and the like. Step 6 (inspection) performs various tests for the semiconductor device made in Step 5, such as a validity test and a durability test. Through these steps, a semiconductor device is finished and shipped (Step 7).

FIG. 9 is a detailed flow of the wafer process. Step 11 (oxidation) oxidizes the wafer's surface. Step 12 (CVD) forms an insulating film on the wafer's surface. Step 13 (electrode formation) forms electrodes on the wafer by vapor disposition and the like. Step 14 (ion implantation) implants ions into the wafer. Step 15 (resist process) applies a photosensitive material onto the wafer. Step 16 (exposure) uses the exposure apparatus of the first embodiment to expose a circuit pattern on the mask onto the wafer. Step 17 (development) develops the exposed wafer. Step 18 (etching) etches parts other than a

developed resist image. Step 19 (resist stripping) removes disused resist after etching. These steps are repeated, and multilayer circuit patterns are formed on the wafer.

5 The device fabrication method of this embodiment may manufacture higher quality devices than the conventional one.

 The entire disclosure of Japanese Patent Application No. 2003-422932 filed on Dec. 19, 2003
10 including claims, specification, drawings, and abstract are incorporated herein by reference in its entirety.

 As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be
15 understood that the invention is not limited to the specific embodiments thereof except as defined in the claims.

INDUSTRIAL APPLICABILITY

20

 The inventive exposure apparatus injects carbon dioxide into the fluid used for the immersion method, and restrains the static electricity that would otherwise generate on the substrate surface.

25 The inventive device manufacturing method can transfer an image of a device pattern on the mask onto a device substrate with high precision, and

manufactures highly integrated devices, which are hard to manufacture in the prior art.

CLAIMS:

1. An exposure apparatus comprising:
a projection optical system for projecting a
5 pattern of a mask onto a substrate; and
a fluid supply unit for supplying a fluid
between said projection optical system and the
substrate, said fluid supply unit including an
injection unit for injecting carbon dioxide into the
10 fluid.
2. An exposure apparatus according to claim 1,
wherein said fluid supply unit includes a degassing
unit for degassing the fluid, said degassing unit being
15 located at an upstream side of the injection unit.
3. An exposure apparatus according to claim 1 or
2, wherein said injection apparatus includes a membrane
module for injecting the carbon dioxide.
20
4. An exposure apparatus according to any one of
claims 1 to 3, wherein the injection unit injects the
carbon dioxide at a concentration of the carbon dioxide
in the fluid between 0.02 ppm and 750 ppm.
25
5. An exposure apparatus according to claim 4,
wherein the injection unit injects the carbon dioxide

at the concentration of the carbon dioxide in the fluid between 0.06 ppm and 300 ppm.

6. An exposure apparatus according to any one of
5 claims 1 to 3, wherein the fluid supply unit includes a resistivity meter for measuring a resistivity value of the fluid, and the injection unit injects the carbon dioxide based on a measurement result of the resistivity meter.

10

7. An exposure apparatus according to any one of claims 1 to 3 and 6, wherein the injection unit injects the carbon dioxide so that a resistivity value of the fluid is between $0.02 \text{ M}\Omega\cdot\text{cm}$ and $10 \text{ M}\Omega\cdot\text{cm}$.

15

8. An exposure apparatus according to claim 7, wherein the injection unit injects the carbon dioxide so that the resistivity value of the fluid is between $0.04 \text{ M}\Omega\cdot\text{cm}$ and $5 \text{ M}\Omega\cdot\text{cm}$.

20

9. An exposure apparatus comprising:
an illumination optical system for
illuminating a mask using light from a light source;
and
25 a projection optical system for projecting a pattern of the mask onto a substrate,

wherein a fluid supplied to a space between said projection optical system and the substrate has a concentration of carbon dioxide between 0.02 ppm and 750 ppm.

5

10. An exposure apparatus according to claim 9, wherein the injection unit injects the carbon dioxide at the concentration of the carbon dioxide in the fluid between 0.06 ppm and 300 ppm.

10

11. An exposure apparatus comprising:
an illumination optical system for illuminating a mask using light from a light source;
and

15 a projection optical system for projecting a pattern of the mask onto a substrate,

wherein a fluid supplied to a space between said projection optical system and the substrate has a resistivity value between 0.02 M Ω ·cm and 10 M Ω ·cm.

20

12. An exposure apparatus according to claim 11, wherein the injection unit injects the carbon dioxide so that the resistivity value between 0.04 M Ω ·cm and 5 M Ω ·cm.

25

13. A device manufacturing method comprising the steps of:

exposing an object using an exposure
apparatus according to any one of claims 1 to 12; and
developing the exposed object.

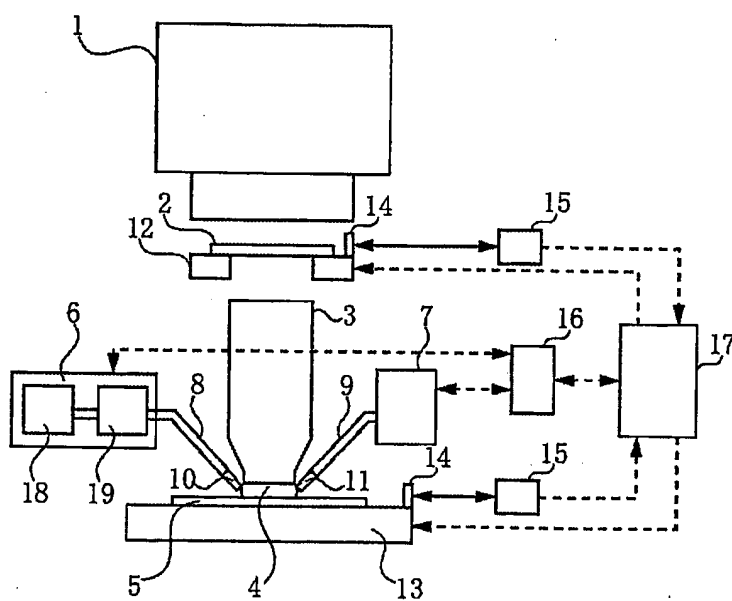


FIG. 1

2/9

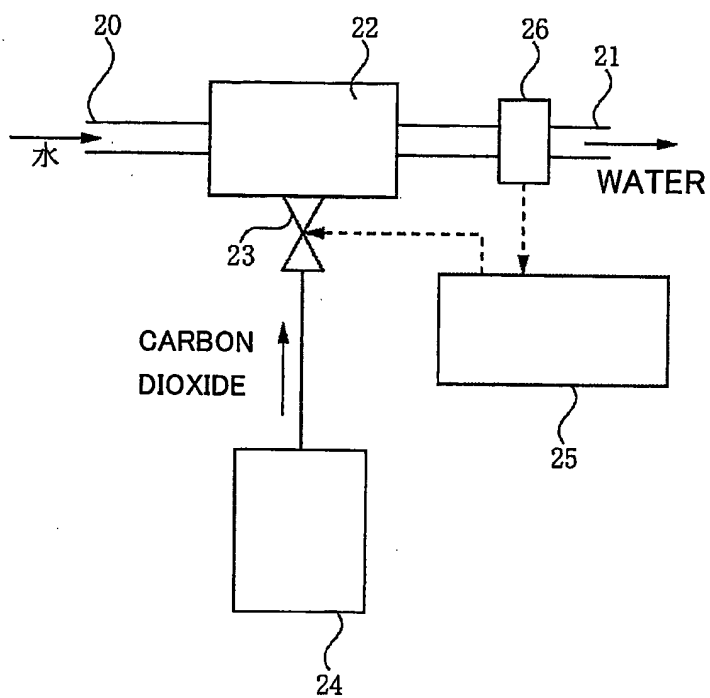


FIG. 2

3/9

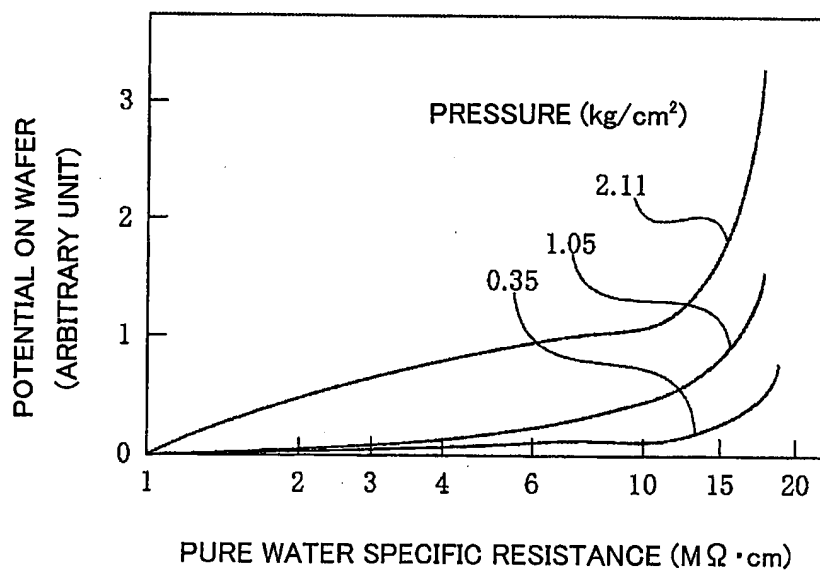


FIG. 3

4/9

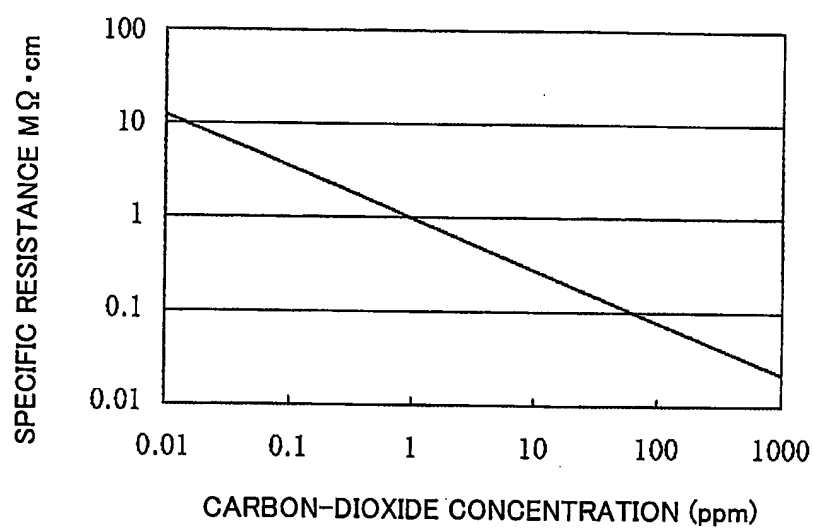


FIG. 4

5/9

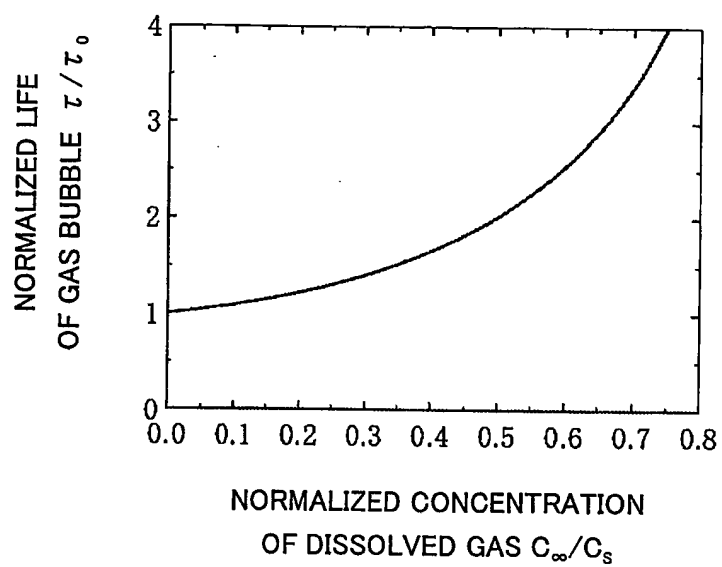


FIG. 5

6/9

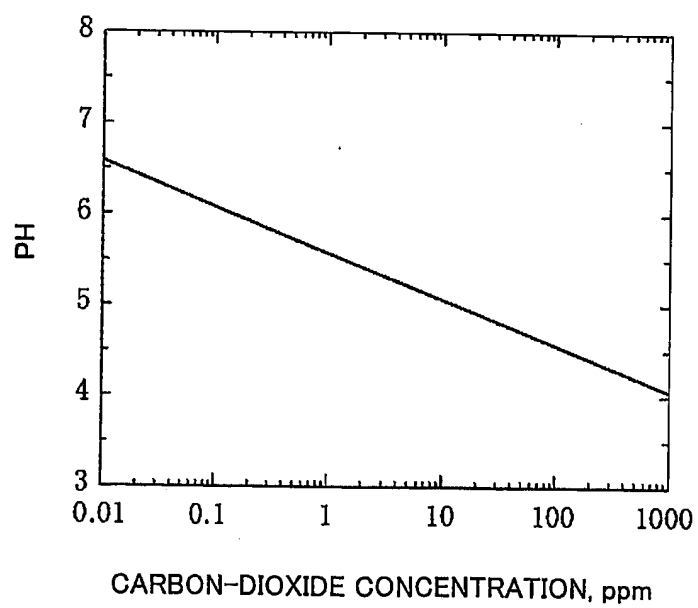


FIG. 6

7/9

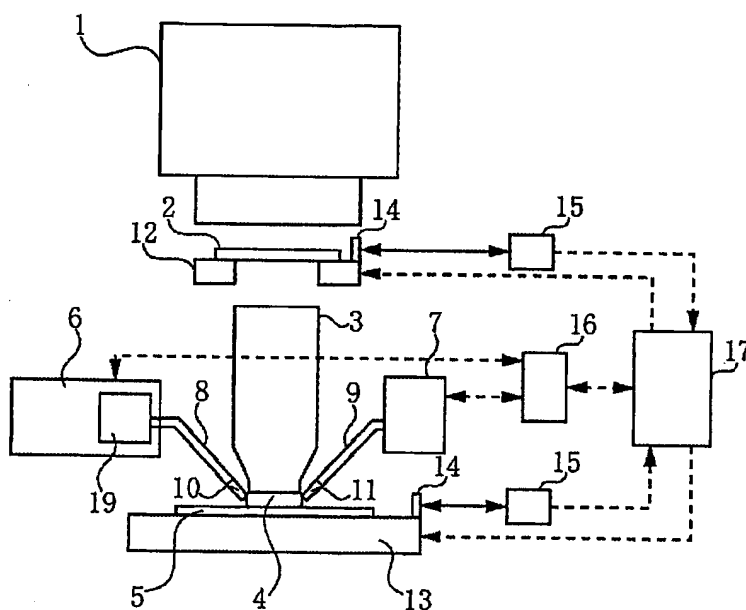


FIG. 7

8/9

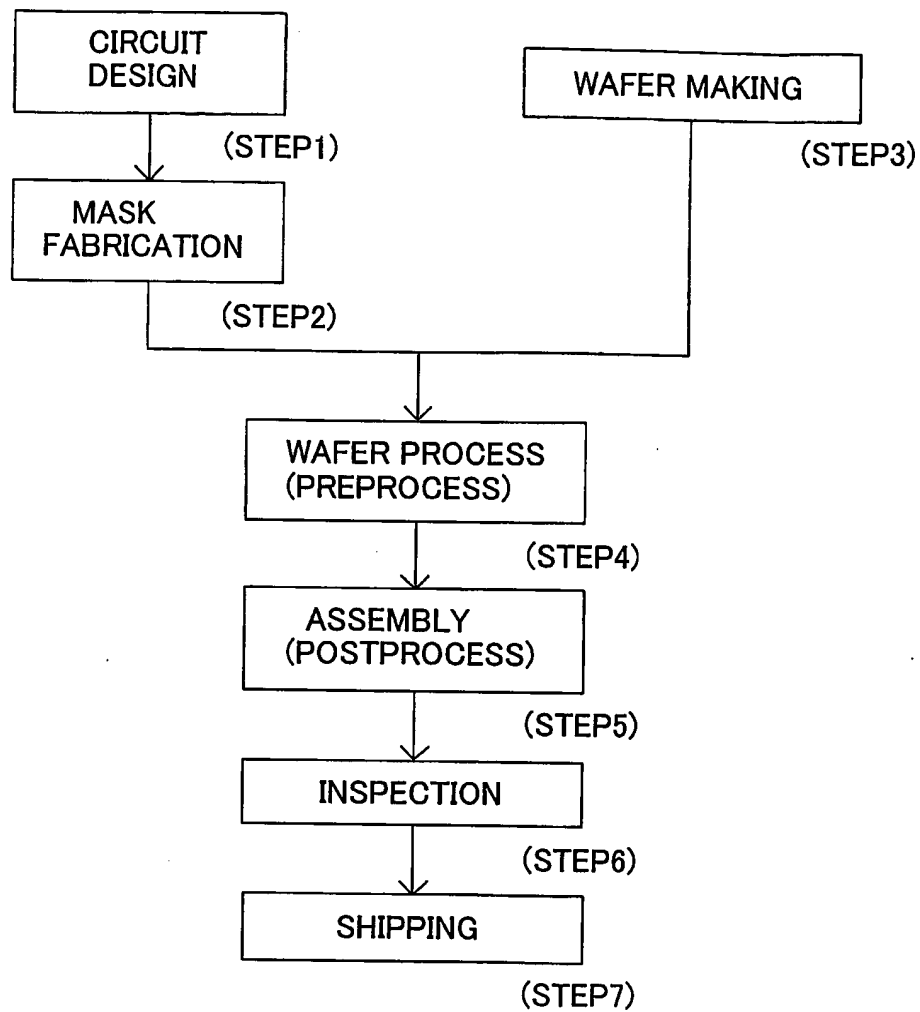


FIG. 8

9/9

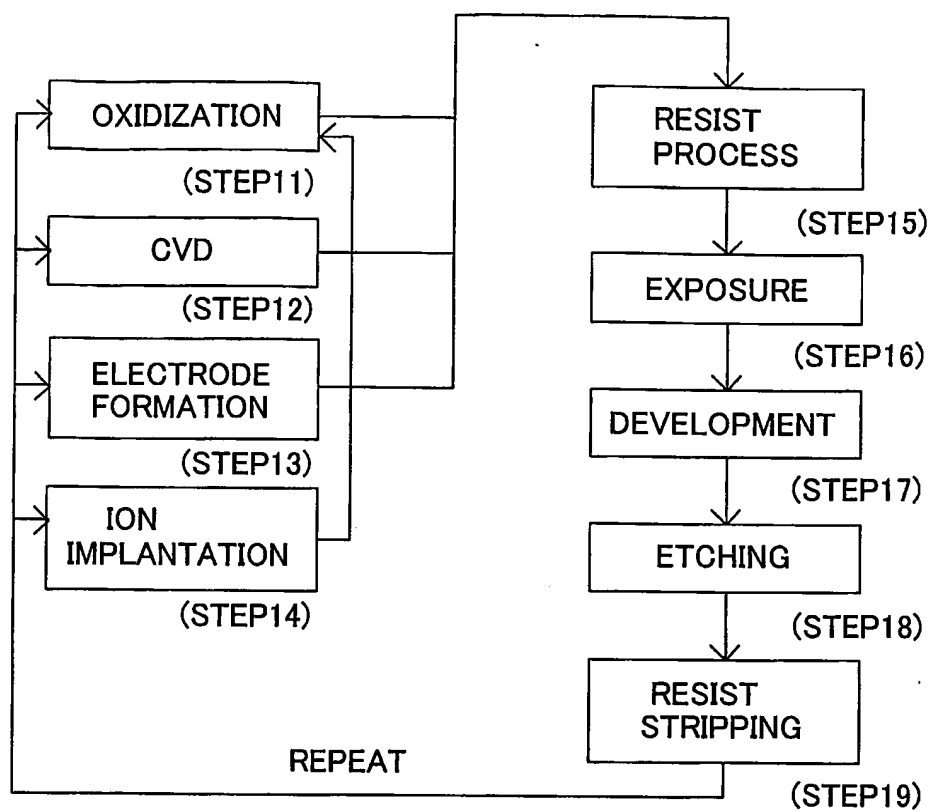


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/018958

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl.⁷ H01L21/027, G03F7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ H01L21/027, G03F7/20

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 Japanese Utility Model Gazette 1922-1996, Japanese Publication of Unexamined Utility Model Applications 1971-2005, Japanese Registered Utility Model Gazette 1994-2005, Japanese Gazette Containing the Utility Model 1996-2005

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99/49504 A1 (NIKON CORP.) 1999.09.30 Front page & AU 2747999 A	1-13
A	JP 11-176727 A (NIKON CORP.) 1999.07.02 [0013] (family none)	1-13
A	JP 10-303114 A (NIKON CORP.) 1998.11.13 Claim 2 (family none)	1-13
A	JP 10-340846 A (NIKON CORP.) 1998.12.22 Front page, [0026] (family none)	1-13
A	JP 10-154659 A (NIKON CORP.) 1998.06.09 [0141]-[0146], Fig.12 & US 5825043 A1 & US 6191429 B1 & EP 834773 A2	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15.03.2005

Date of mailing of the international search report

05.4.2005

Name and mailing address of the ISA/JP

Japan Patent Office

3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan

Authorized officer

Tsutomu Iwamoto

Telephone No. +81-3-3581-1101 Ext. 3274

2M

9355

INTERNATIONALSEARCHREPORT

International application No.

PCT/JP2004/018958

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	JP 2004-282023 A (NIKON CORP.) 2004.10.07 Front page, Claim 11 (family none)	1-13
P,A	WO 2004/090956 A1 (NIKON CORP.) 2004.10.21 Description page.7, Figs.1&2 (family none)	1-13
E,A	EP 1486827 A2 (ASML Netherlands B.V.) 2004.12.15 Front page & JP 2005-005713 A & US 2005/024609 A1	1-13

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.